



REMOTE POWER SUPPLIES

RMTPS-UNV-96-48-N											
Driver Type	Description	Nominal Input Voltage (VAC)	Number of Channels	P-Out Max (W)	V-Out Max (Vdc)	I-Out Min (A)	I-Out Max (A)	Open Loop Voltage (No Load Vout Max) (Vdc)	Fixture Cable	NPT Plugs	Enclosure
On/Off	Remote Power Supply, 120-277v, 96 Watts, 48v Output, On/Off	120 to 277	1	96	48	0.1	2.0	51.36	1 Cord Grip	(3) 1/2 NPT Plugs to be removed as required for 1/2 NPT water tight conduit fittings (by others)	Included, IP66 Rated

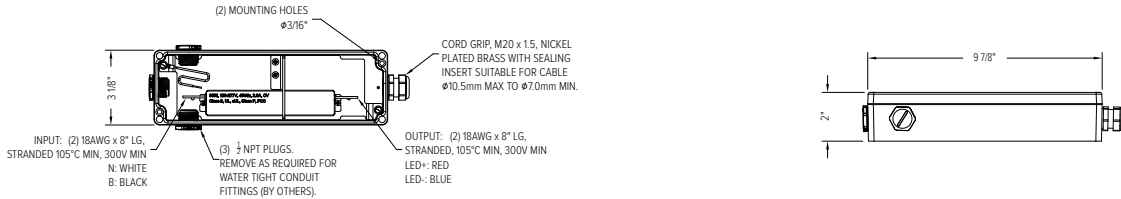

RMTPS-UNV-200-48-N																
Driver Type	Description	Nominal Input Voltage (VAC)	Number of Channels	P-Out Max (W)	Constant Current Mode				Constant Voltage Mode				Max Output Power (per channel) (W)	Enclosure		
					Current Per Channel (A)	Compliance (LED) Voltage (Vdc)		Current Pot Adjustable Range (All Channels) (A)		Preset Vout (Vdc)	Load Range (per channel) (A)				Voltage Pot Adjustable Range (Vdc)	
						Min.	Max.	Min.	Max.		Min.	Max.			Min.	Max.
On/Off	Remote Power Supply, 120-277v, 200 Watts, 48v Output, On/Off	90-305	2	200	2.1	24	48	0.21	4.38	48	0	2.19	33.6	50.4	100	Integral to Driver; Plug and Play

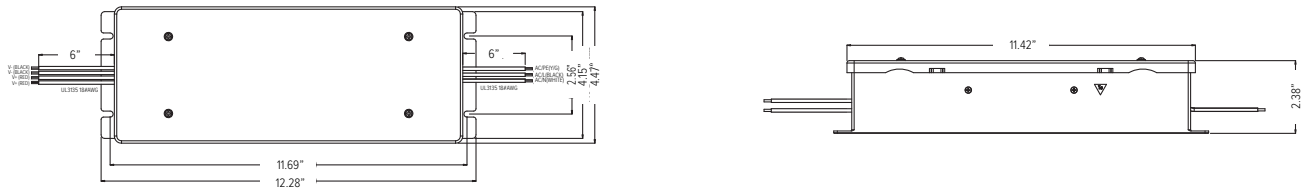

ACCESSORIES

NOTE: Accessories are ordered and shipped separately from luminaire for field installation. XX* indicates a painted accessory. See below for painted accessory ordering information.

PAINTED ACCESSORIES					
MODEL		FINISH (*-XX)		OPTION	
EKLPS-SNOOT	Snoot	AG	Anthracite Grey	AST	Anti-Saline Treatment
		BL	Black		
		SG	Griven Silver Grey		
		WH	White		
		CC	Custom RAL Color		

