JUPITER
Dynamic White

GRIVEN

DESCRIPTION

JUPITER is a ground-breaking medium-throw, exterior surface mount spot, flood, and accent lighting solution with a modern, elegant, and clean design for unobtrusive installation within the landscape. Distinguished by high luminous efficacy, the IP67 rated luminaire features a choice of ten light distributions and four standard finishes.

Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE

MODEL	CCT	CONTROL	CABLE	VOLTAGE	OPTIC	FINISH	OPTION
JUPI Jupiter	**DW** Dynamic White (2700K to 6500K)	**DMX-RDM** DMX/RDM	**S** Power in, DMX in, DMX out (59")	**UNV** 120 - 277V	**SP** Spot 12°	**AG** Anthracite Grey	**AST** Anti-Saline Treatment
			M Monocable Without Connectors (19.7")		**NB** Narrow 15°	**BL** Black	**3G** 3G Mounting Yoke
			C Monocable With Connectors (19.7")		**MB** Medium 25°	**SG** Griven Silver Grey	**LVR** Internal Honeycomb Louver
					WB Wide 45°	**WH** White	
					EW Extra Wide 60°	**CC** Custom Color	
					ELH Elliptical Horizontal 39° x 14°		
					ELWH Elliptical Wide Horizontal 37° x 23°		
					WW Wall Wash 36° x 19° (5° incline)		

Custom options are available; consult factory via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

See Page 5 for ordering information of available accessories.

TRADE AGREEMENT ACT COMPLIANCE EXPERIENCE BRANDS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.

JUPITER
Dynamic White

GRIVEN

		JUPITER
PHYSICAL	HOUSING	Die-Cast Aluminum
	LENS	Clear Tempered Glass
	OVERALL DIMENSIONS	7.32" L x 5.28" W x ø6.77"
	WEIGHT	6.6 Pounds
	OPERATING TEMPERATURE	-40°F to 122°F (-40°C to 50°C)

ELECTRICAL	POWER	38 Watts		
	CURRENT	0.32 amps at 120 volts 0.14 amps at 277 volts		
	CONTROL	DMX-RDM / Automatic / Master-Satellite		
	CABLE	S Cable	M Cable	C Cable
		Power In, DMX In, DMX Out Cables	6-Polarity In and Out Power/Data Monocable Without Connectors	6-Polarity In and Out Power/Data Monocable With Connectors
	CABLE LENGTH	59"	19.7"	19.7"

PHOTOMETRIC	LED	Dynamic White (2700K to 6500K)
	NUMBER OF LEDS	16
	DRIVER LOCATION	Integral
	DELIVERED LUMEN OUTPUT	up to 3322 lumens
	EFFICACY	up to 87 lumens per watt
	LUMEN MAINTENANCE	L70 > 100,000 Hours at 77°F*
	LIGHT CONTROL ACCESSORIES	Snoot, Visor, Internal Honeycomb Louver Available

LIGHT DISTRIBUTIONS	DISTRIBUTION	BEAM ANGLE	LUMENS	EFFICACY	MAX. CANDELA
	Spot	12°	3322	87	43691
	Narrow	15°	3053	80	28271
	Medium	25°	3043	80	14243
	Wide	45°	3073	81	5021
	Extra Wide	60°	3241	85	3295
	Elliptical Horizontal	39° x 14°	3001	79	13954
	Elliptical Wide Horizontal	37° x 23°	2729	72	8242
Values based on full output.	Wall Wash (5° Incline)	36° x 19°	2753	72	9996

CERTIFICATIONS	SAFETY	ETL Certified for Wet Locations
	INGRESS PROTECTION	IP67
	IMPACT RATING	IK07
	WARRANTY	Limited Five Year Warranty

*LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.

DIMENSIONS

All dimensions are shown in inches unless otherwise noted.

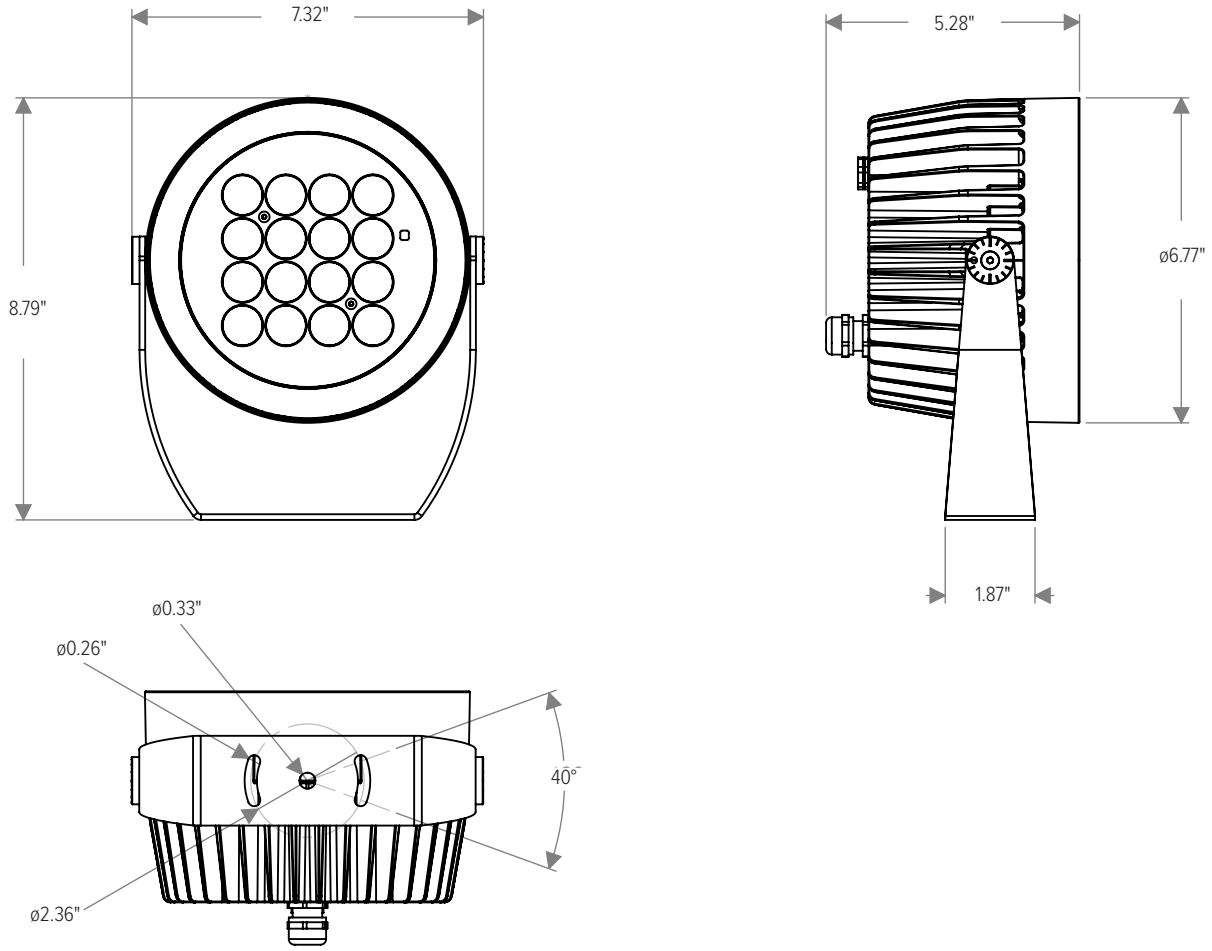

OPTIC ORIENTATION

Consult factory for availability of optional spreading diffusers.

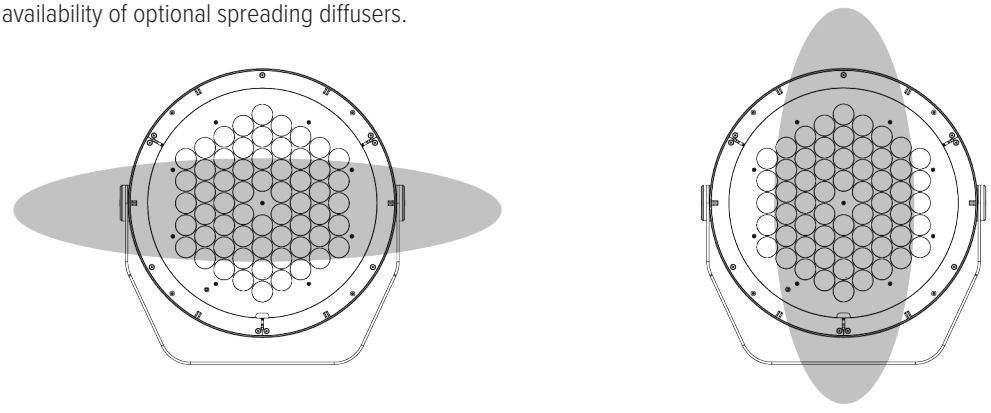

HORIZONTAL MODE (Standard)

VERTICAL MODE (On Request)

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.

ACCESSORY DIMENSIONS

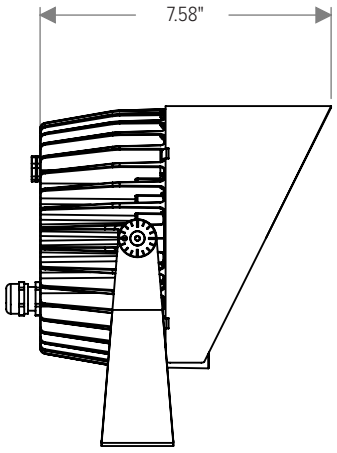

With Visor (JUPI-VISOR-XX)

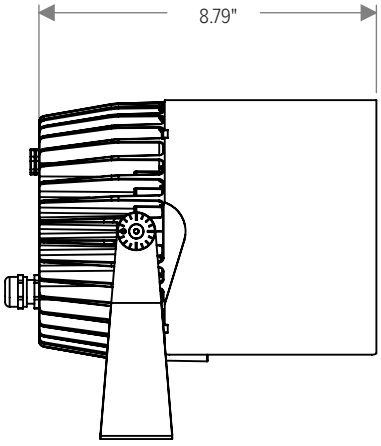

With Snoot (JUPI-SNOOT-XX)

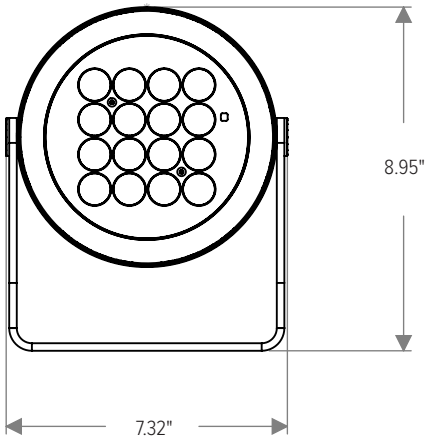

With 3G Mounting Yoke (Ordered With Luminaire)

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.

ACCESSORIES

NOTE: Accessories are ordered and shipped separately from luminaire for field installation.
-XX* indicates a painted accessory. See bottom of page for painted accessory ordering information.

JUPI-SNOOT-XX*
Snoot

JUPI-VISOR-XX*
Visor

GRV-DMX-TERM-CON
DMX Terminator

GRV-JB-MCSL-C
Start Line J-Box with Connectors

GRV-JB-MCDC-C
DMX Continuation J-Box with Connectors

GRV-JB-MCPC-C
Power Continuation J-Box with Connectors

GRIVEN-CON-KIT-8284
"S" Cable Connection Kit

GRIVEN-CON-KIT-8286
"M" Cable Connection Kit

GRV-JC-MCC-1M
Connection Cable- 1 Meter (3' 3")

GRV-JC-MCC-2M
Connection Cable- 2 Meters (6' 6")

GRV-JC-MCC-3M
Connection Cable- 3 Meters (9' 10")

GRV-JC-MCC-5M
Connection Cable- 5 Meters (16' 4")

GRV-JC-MCC-10M
Connection Cable- 10 Meters
(32' 10")

ORDERING INFORMATION

PAINTED ACCESSORIES

MODEL		FINISH (*-XX)		OPTION	
JUPI-SNOOT	Snoot	AG	Anthracite Grey	AST	Anti-Saline Treatment
JUPI-VISOR	Visor	BL	Black		
		SG	Griven Silver Grey		
		WH	White		
		CC	Custom RAL Color		

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.

PHOTOMETRICS

CANDELA DISTRIBUTION

HORIZONTAL
VERTICAL

SPOT 12°

Maximum Candela = 43,691 / 3322 Lumens

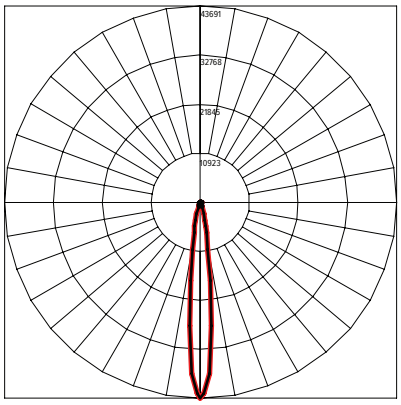

NARROW 15°

Maximum Candela = 28,271 / 3053 Lumens

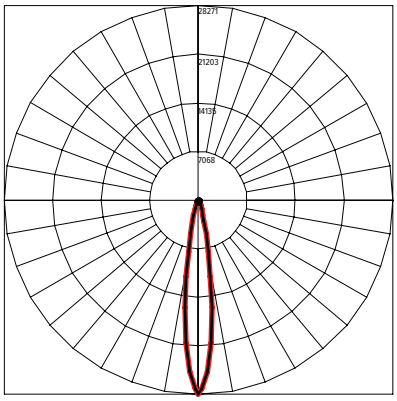

MEDIUM 25°

Maximum Candela = 14,243 / 3042 Lumens

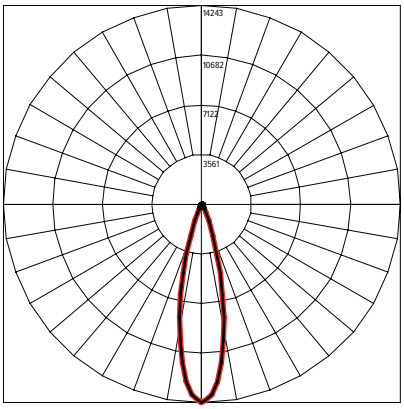

WIDE 45°

Maximum Candela = 5021 / 3073 Lumens

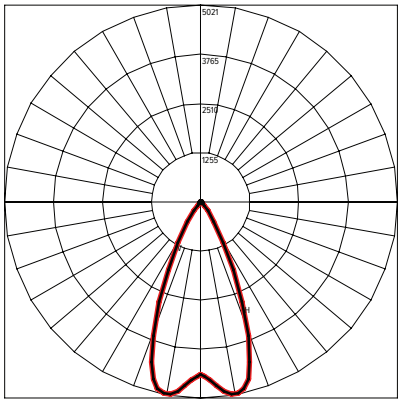

EXTRA WIDE 60°

Maximum Candela = 3295 / 3241 Lumens

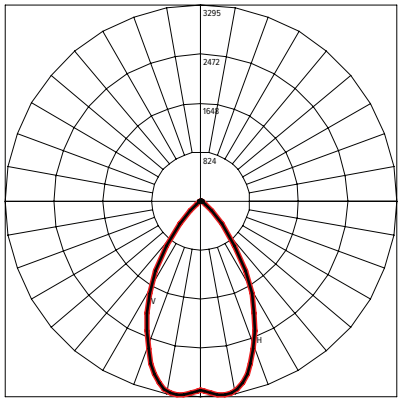

ELLIPTICAL HORIZONTAL 39° X 14°

Maximum Candela = 13,954 / 3001 Lumens

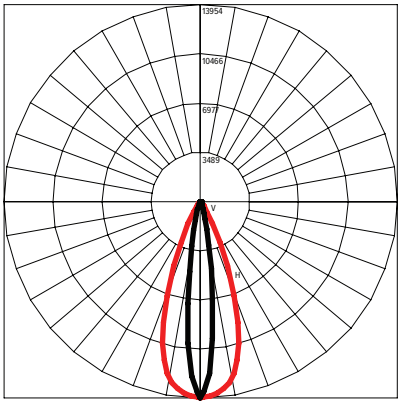

ELLIPTICAL WIDE HORIZONTAL 37° X 23°

Maximum Candela = 8242 / 2729 Lumens

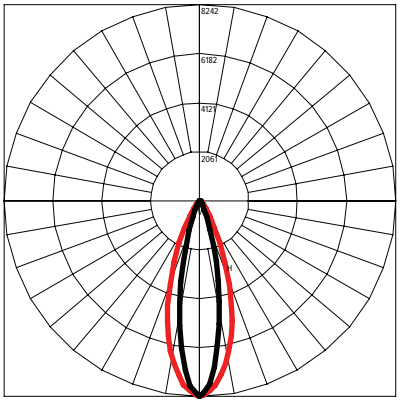

WALL WASH 36° x 19°

Maximum Candela = 9996 / 2753 Lumens

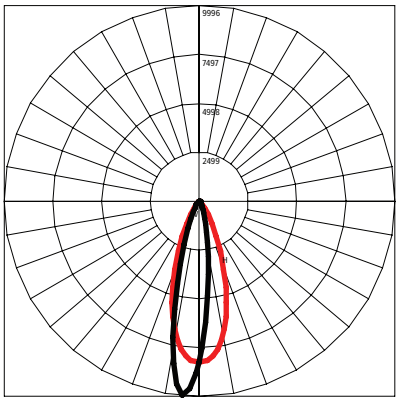

CONNECTIONS

"S" Type Cable (Power In, DMX In, DMX Out)

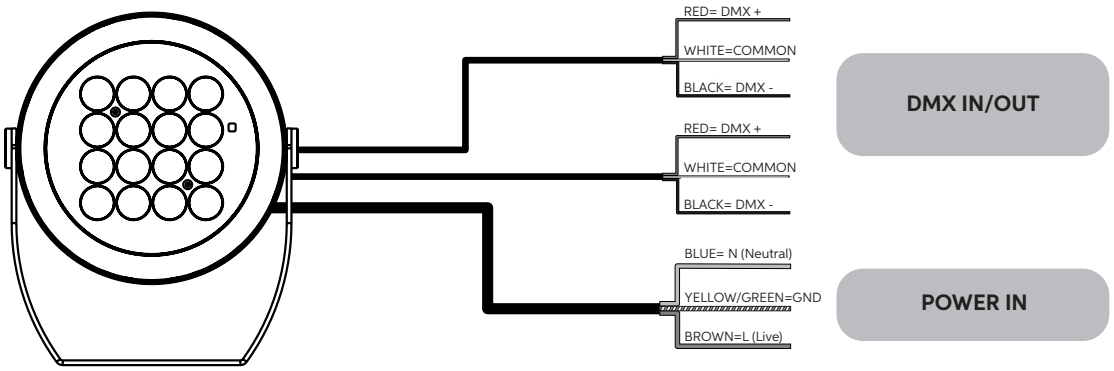

"M" Type Cable (Monocable Without Connectors)

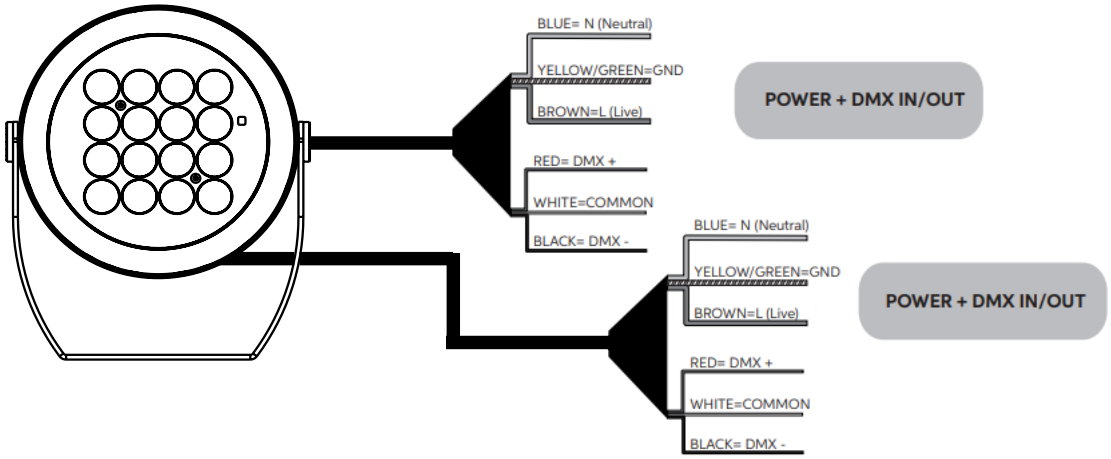

"C" Type Cable (Monocable With Connectors)

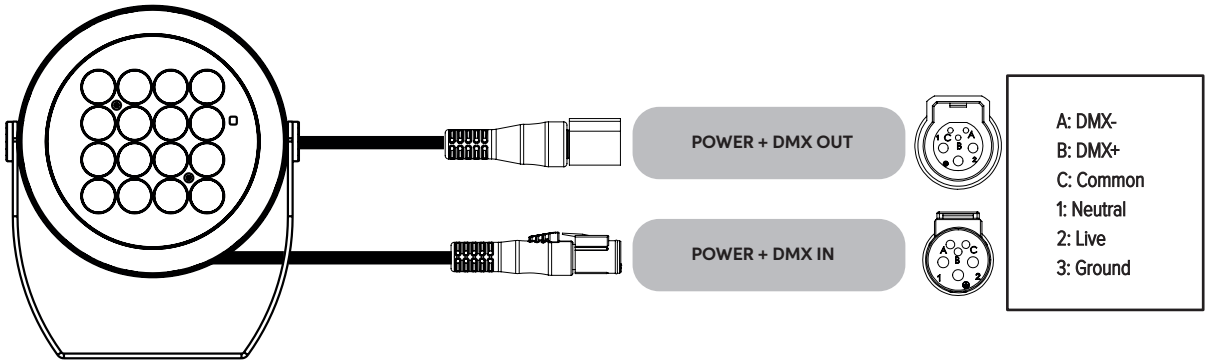

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.

CONFIGURATION

DMX Chain configuration - S type cable

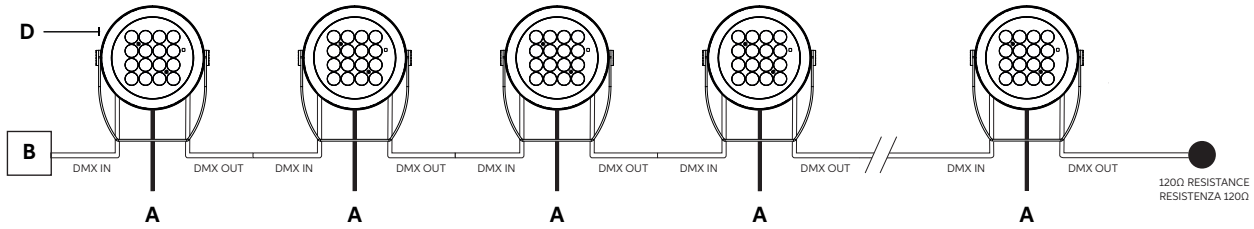

Single Chain configuration - C type cable

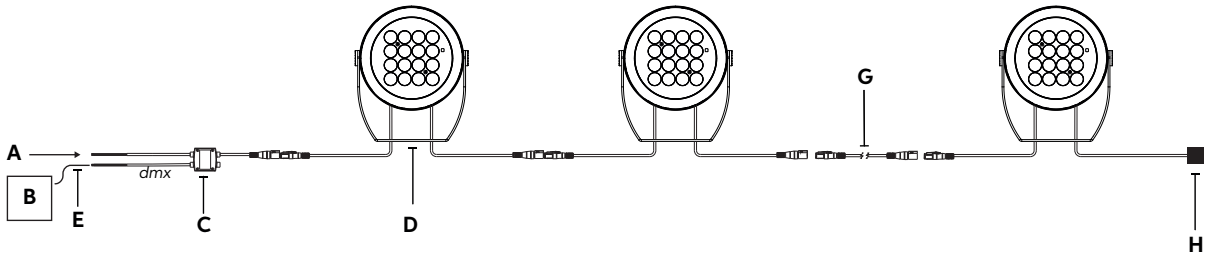

Multi Chain configuration using DMX Junction Box - C type cable

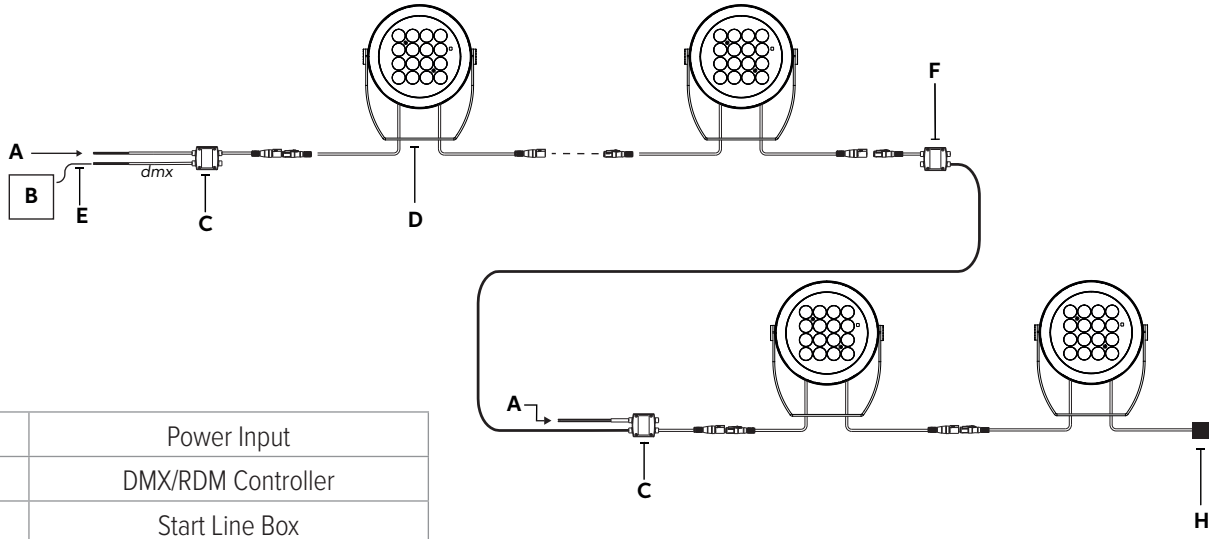

A	Power Input
B	DMX/RDM Controller
C	Start Line Box
D	Jupiter
E	DMX Cable
F	DMX Junction Box
G	Connection Cable
H	DMX Terminator

CUSTOMIZE YOUR EXPERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.

Ready to Get Started? Email us at: DesignServices@exp-brands.com

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. †Consult the factory to verify current status of BAA/TAA/BABAA compliance.