CONNECTION

"P" Type Cable (Power In)

59 in.

Blue= VDC -

Brown= VDC +

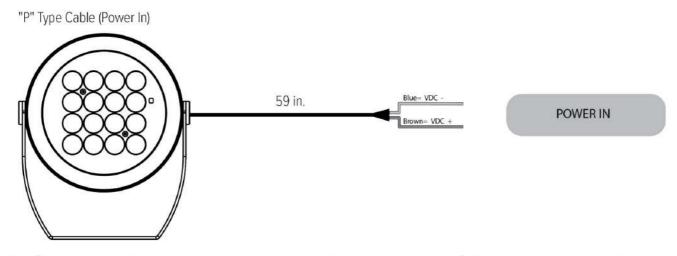POWER IN

Note: The power and signal connections can be carried out by using the optional connection kit. Follow the instructions provided along with the connection kit.

REMOTE POWER SUPPLIES

RMTPS-UNV-96-48-N

Driver Type	Description	Nominal Input Voltage (VAC)	Number of Channels	P-Out Max (W)	V-Out Max (Vdc)	I-Out Min (A)	I-Out Max (A)	Open Loop Voltage (No Load Vout Max) (Vdc)	Fixture Cable	NPT Plugs	Enclosure
On/Off	Remote Power Supply for Single Luminaire, 120-277v, 96 Watts, 48v Output, On/Off	120 to 277	1	96	48	0.1	2.0	51.36	1 Cord Grip	(3) 1/2 NPT Plugs to be removed as required for 1/2 NPT water tight conduit fittings (by others)	Included, IP66 Rated

(2) MOUNTING HOLES
φ3/16"

CORD GRIP, M20 x 1.5, NICKEL PLATED BRASS WITH SEALING INSERT SUITABLE FOR CABLE φ10.5mm MAX TO φ7.0mm MIN.

3 1/8"

96W, 120-277V, 48Vdc, 2.0A, 0V
Class 2, UL, cUL, Class P, FCC

INPUT: (2) 18AWG x 8" LG, STRANDED 105°C MIN, 300V MIN
N: WHITE
B: BLACK

(3) 1/2 NPT PLUGS. REMOVE AS REQUIRED FOR WATER TIGHT CONDUIT FITTINGS (BY OTHERS).

OUTPUT: (2) 18AWG x 8" LG, STRANDED, 105°C MIN, 300V MIN
LED+: RED
LED-: BLUE

9 7/8"

2"

EXPERIENCE BRANDS

www.griven-usa.com (For other Experience® Brands companies, please visit www.experiencebrandsusa.com)
In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on www.griven-usa.com are the most recent ones available.

7/9

Rev 20230410