


PARADE L RECESSED

RGBW



DESCRIPTION

PARADE L recessed linear luminaires are available in two or three foot lengths. Each model features premium quality high-brightness LEDs and a comprehensive selection of eight light distributions. Standard built-in programming capabilities include standalone or master-satellite configurations without the use of external control systems, or operation by remote DMX512 control systems. Recessed housing, trim, and hardware are stainless steel.

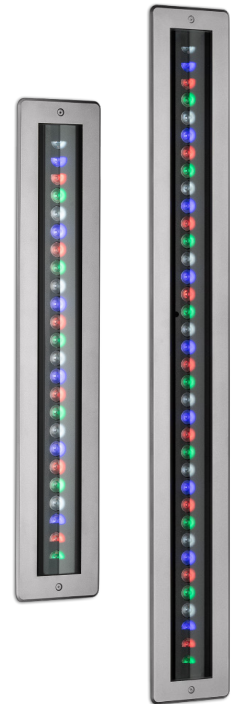

IP67/ IK10 /  / 

Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE						
MODEL	CCT	CONTROL	CABLE	VOLTAGE	OPTIC	OPTION
PDL2R Parade L2 Recessed- 2' Length	RGBW30K RGBW (3000K White)	DMX-RDM DMX-RDM	M Monocable only (19.7")	UNV 120-277v	SP Spot 8°	LVR Internal Honeycomb Louver
PDL3R Parade L3 Recessed- 3' Length	RGBW40K RGBW (4000K White)				NB Narrow 10°	
PDL2RPE Parade L2 Recessed Polar Edition- 2' Length					MB Medium 26°	
PDL3RPE Parade L3 Recessed Polar Edition- 3' Length					WB Wide 40°	
					EW Extra Wide 58°	
					ELH Elliptical 42° x 11°	
					ELWH Elliptical Wide 40° x 24°	
					WW Wall Wash 36° x 15° (5° Incline)	

Custom options are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

ACCESSORIES (Required, Ordered Separately)						
PDL2R-RBB	Parade L2 Recessed Back Box	IR-CONFIG-REMOTE¹	Infrared DMX Configuration Remote	GRIVEN-CON-KIT-8287	Connection Kit for DMX "M" Cables	
PDL3R-RBB	Parade L3 Recessed Back Box					

¹Unless an RDM compatible control is used, one IR-CONFIG-REMOTE must always be purchased with one or more DMX/RDM luminaires in order to access DMX addressing.

PARADE L RECESSED

RGBW



		PARADE L2 RECESSED	PARADE L3 RECESSED
PHYSICAL	HOUSING	Extruded Aluminum	
	LENS	Tempered Glass	
	DRIVER LOCATION	Integral	
	DIMENSIONS (LUMINAIRE + BACK BOX)	26 3/4" L x 5 5/8" W x 4 1/2" H	38 3/4" L x 5 5/8" W x 4 5/8" H
	WEIGHT	15.2 Pounds	21 Pounds
	OPERATING TEMPERATURE	-40°F to 122°F (-40°C to 50°C)	

ELECTRICAL	VOLTAGE	Universal 120 to 277 Volts	
	POWER CONSUMPTION	38 Watts	58 Watts
	CURRENT	0.32 Amps at 120 Volts 0.14 Amps at 277 Volts	0.48 Amps at 120 Volts 0.21 Amps at 277 Volts
	CONTROL	DMX-RDM	

PHOTOMETRIC	LED	RGBW (3000K or 4000K White)
	LUMEN MAINTENANCE	L80 > 70,000 Hours at 77°F*
	CRI	80 or 90 CRI

			PARADE L2 RECESSED				PARADE L3 RECESSED			
LIGHT DISTRIBUTIONS	DISTRIBUTION	BEAM ANGLE	RGBW 3000K		RGBW 4000K		RGBW 3000K		RGBW 4000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
			SPOT	8°	2024	53	2086	55	2462	42
NARROW	10°	1945	51	2005	53	2375	41	2448	42	
MEDIUM	26°	1952	51	2011	53	2383	41	2457	42	
WIDE	40°	1756	46	1809	48	2144	37	2210	38	
EXTRA-WIDE	58°	1374	36	1416	37	1677	29	1729	30	
ELLIPTICAL	42° X 11°	1822	48	1878	49	2224	38	2293	40	
ELLIPTICAL WIDE	40° X 24°	1676	44	1728	45	2047	35	2110	36	
WALL WASH	36° X 15° (5° INCLINE)	1761	46	1814	48	2150	37	2216	38	


CERTIFICATIONS	SAFETY	ETL Certified for Wet Locations
	INGRESS PROTECTION	IP67
	IMPACT RATING	IK10
	WARRANTY	Five Year Limited Warranty

* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.


DIMENSIONS

All dimensions are shown in inches unless otherwise noted.


PARADE L2 RECESSED
Luminaire Dimensions

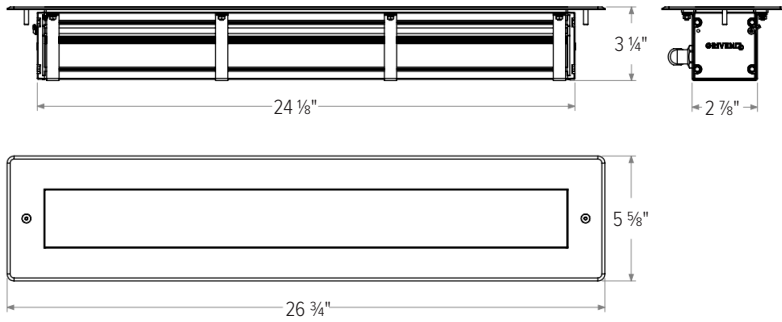


PARADE L2 RECESSED
Back Box Dimensions

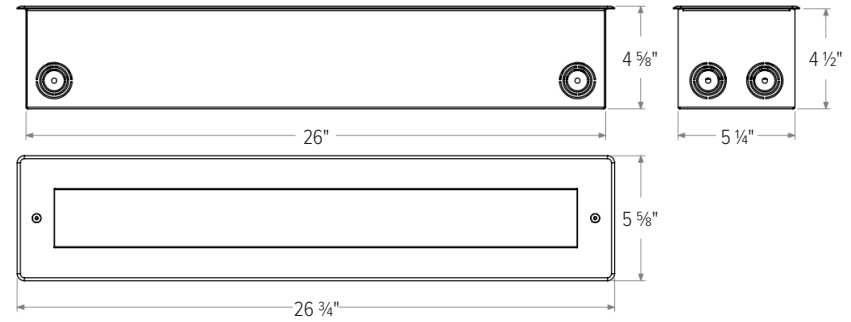

PARADE L3 RECESSED
Luminaire Dimensions

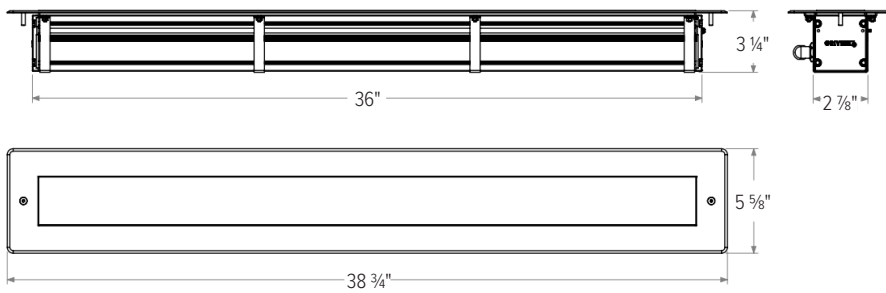

PARADE L3 RECESSED
Back Box Dimensions

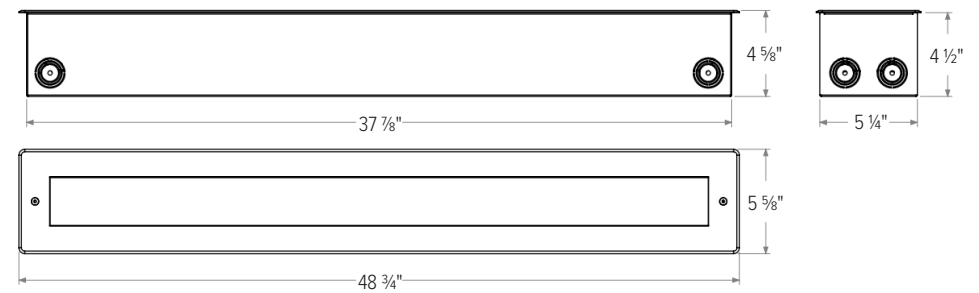

PARADE L RECESSED

RGBW



CONNECTIONS

