

## DESCRIPTION

RUBY R recessed in grade luminaire offers diverse options for spotlighting or wall grazing through an extensive collection of symmetric, elliptical, and wall washing optics. Programming is easily accomplished via a remote infrared controller and will operate in DMX, automatic, or master-satellite modes for expanded versatility. The 11" diameter luminaire has an overall depth of less than six inches, making it suitable for a wide variety of installation conditions for interior or exterior applications. All hardware is stainless steel.



IP66 / IK09 /  / 

Date: _____ Type: _____ Catalog Number: _____  Project Name: _____
--



## ORDERING INFORMATION


LUMINAIRE					
MODEL	CCT	CONTROL	CABLE	VOLTAGE	OPTIC
<b>RUBYR</b> Ruby Recessed	<b>RGBW40K</b> RGBW (4000K)	<b>DMX-RDM</b> DMX/RDM	<b>S</b> Power in (7.9 in.), DMX in, DMX out (59 in.)	<b>UNV</b> 120 - 277V	<b>SP</b> Spot 7°  <b>NB</b> Narrow 11°  <b>MB</b> Medium 21°  <b>WB</b> Wide 43°  <b>EW</b> Extra Wide 69°  <b>ELH</b> Elliptical Horizontal 40° x 11°  <b>ELWH</b> Elliptical Wide Horizontal 40° x 20°  <b>WW</b> Wall Wash/Asymmetric

### ACCESSORIES (REQUIRED- ORDER SEPARATELY)

MODEL
<b>RUBYR-RBB</b> Ruby R Recessed Back Box

## PRODUCT SPECIFICATIONS

Lumen Output	1408 lumens @ 7° RGBW (see pg 4 for output values of all standard colors)
Efficacy	38 (lm/W) RGBW
Lumen Maintenance	100,000 hours L70 @ 25°C*
Color	RGBW (6500K white) (see pg 5 for customization options)
Optics	7°, 11°, 21°, 43°, 69°, 40° x 11°, 40° x 20°, Wall Wash (Additional optics available upon request)
Operating Temperature	-40° to 122° F (-40° to 50°C)
Housing	Die-cast aluminum body with powder coat
Mounting	In-grade
Weight	10.1 lbs. (4.6 kg)
Certification	 
Ingress Protection	Wet location rated IP66
Impact Rating	IK09
Control	Auto Control, DMX 512 (RDM E1.20), Wireless and 0-10V interfaces available
Cable Lengths	DMX: 39.4 inches
Additional Features	Automatic overtemperature protection / Keypad interface

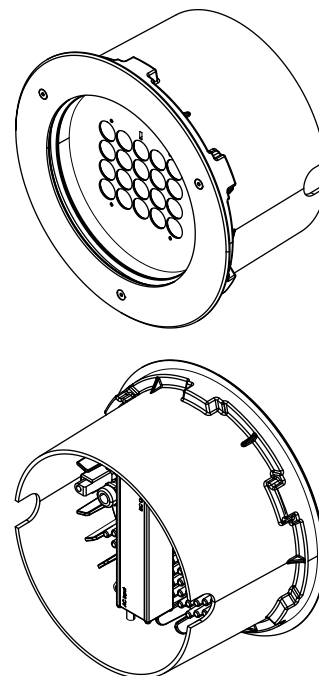


\* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Given values are conservatively derived from those numbers.

## ELECTRICAL SPECIFICATIONS


Input Voltage	100-277 VAC @ 50-60Hz
Power Consumption	37W .32A @ 115VAC, .14A @ 277VAC (RGBW)
Power Factor	>.98 @ 115VAC, >.92 @ 277VAC

## DIMENSIONS


All dimensions are shown in inches unless otherwise noted.

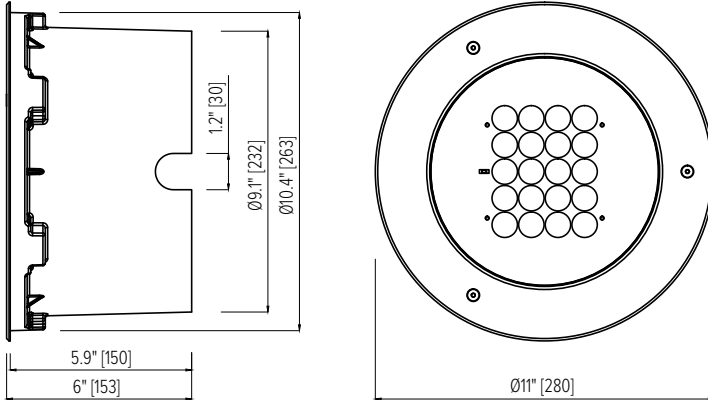

## OPTIC ORIENTATION (For Elliptical Beams)

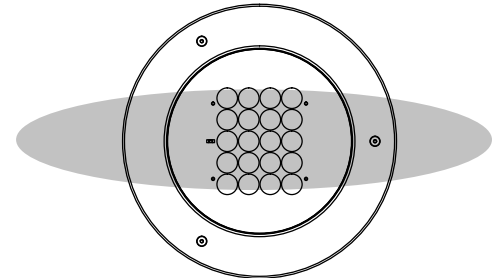


HORIZONTAL MODE (Standard)

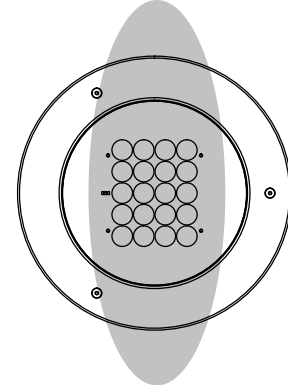

VERTICAL MODE (On Request)

## PHOTOMETRICS


SPOT (RGBW) 7°

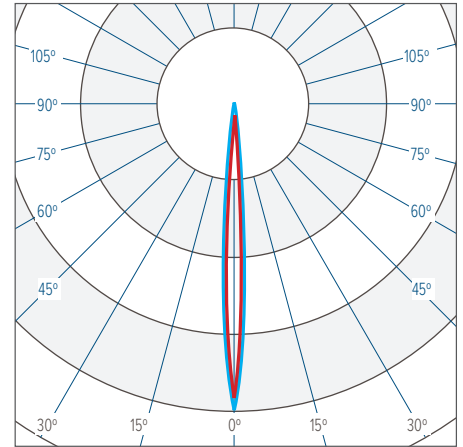

CBCP 55323 1408 lm


### CANDELA DISTRIBUTION (Optical data not currently available for Wall Wash optic)

NARROW (RGBW) 11°

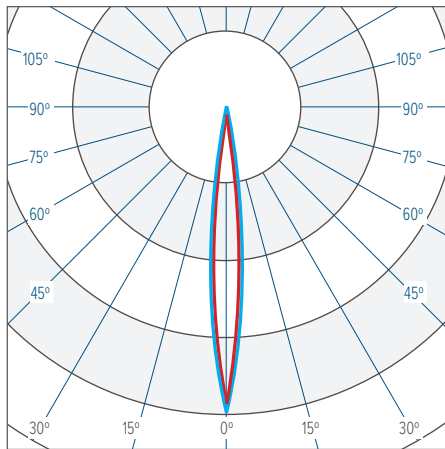


CBCP 22589 1357 lm

MEDIUM (RGBW) 21°

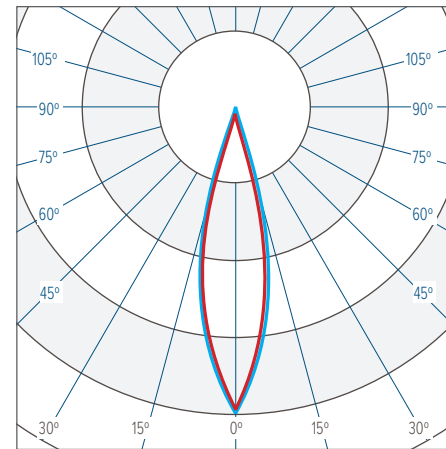


CBCP 7440 1325 lm

WIDE (RGBW) 43°

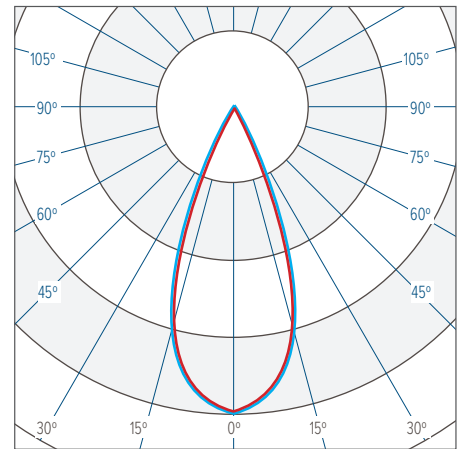


CBCP 2434 1263 lm

EXTRA WIDE (RGBW) 69°

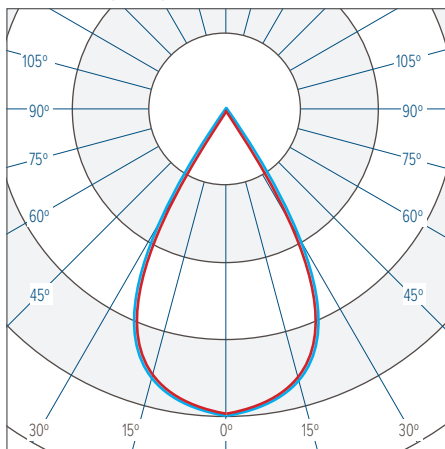


CBCP 981 1157 lm

ELLIPTICAL (RGBW) 40° x 11°

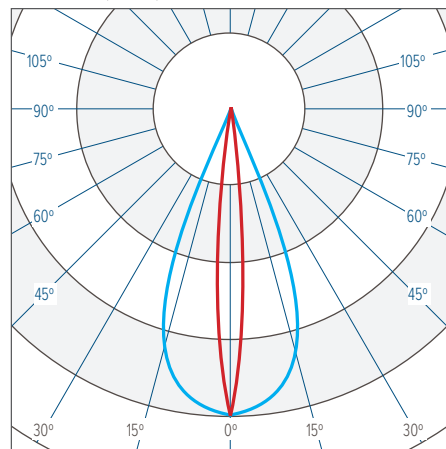

CBCP 8653 1319 lm


ELLIPTICAL WIDE (RGBW) 40° x 20°

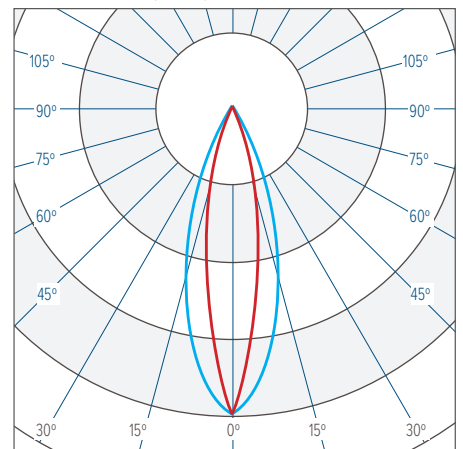

CBCP 4471 1271 lm

## CONTROL OPTIONS (DMX512, PRIMARY CONTROL PLATFORM)

Contact manufacturer for control system development.

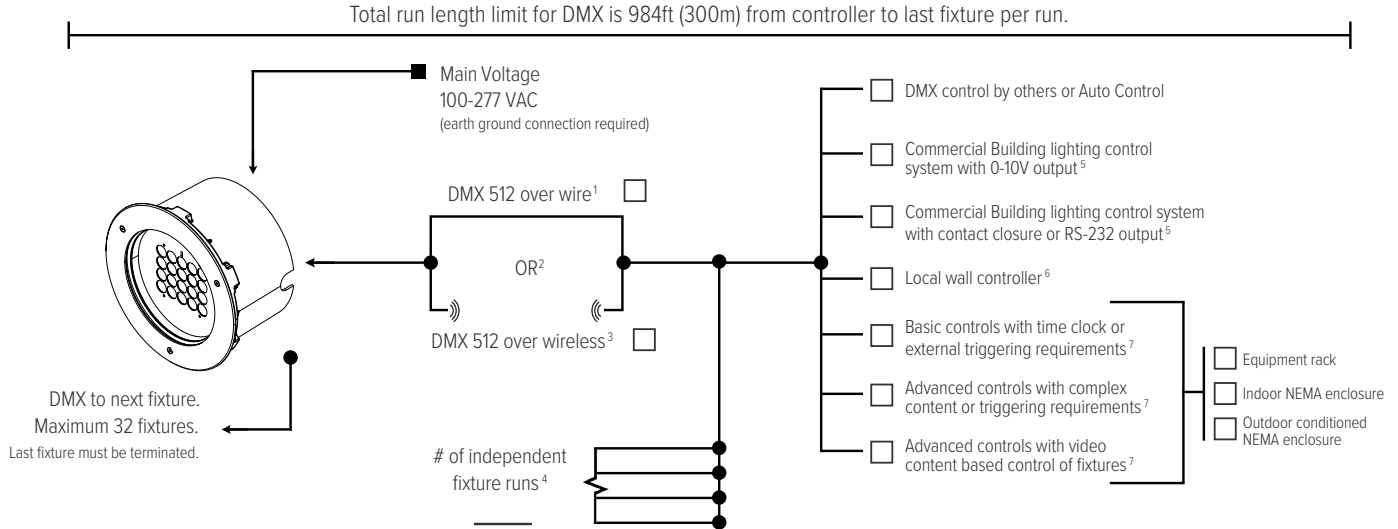

### Notes

1. Wire specifications are available from factory as well as approved wire for purchase.
2. Other control protocol solutions available. Contact factory for more information.
3. Wireless components are external to fixture. Distance limitations based on antennas chosen and site conditions. Contact factory for more information.
4. Based on maximum of 32 fixtures per run as well as any site constraints on conveyance of data.
5. For example: Lutron, Crestron, Encelium, Douglas, ETC by others. Griven control system will interface with building lighting control system.
6. Local wall controller for small applications. Wall controllers specified separately for larger systems.
7. Contact factory for assistance with specification. Onsite commissioning by Griven of control system is required.

## PRODUCT OPTIONS



### SPREADING DIFFUSER

Die cut spreading diffusers can be added to fixture. Factory sealed in fixture for highest performance and durability. Consult factory.



### CUSTOM MONOCHROME

Fixtures with dedicated color LEDs available. Contact Griven USA to confirm availability of a custom color.