


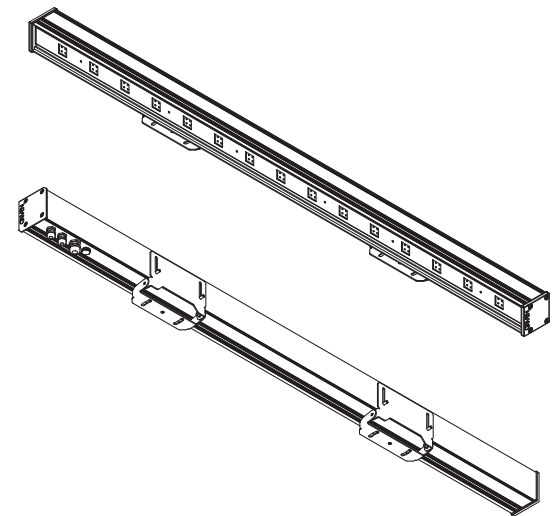
PROJECT	TYPE
SPECIFIER	DATE
ORDER #	QTY

PARADE S is a versatile high flux, high luminance light bar featuring RGBW LEDs grouped in clusters of 4 LEDs each. The luminaire is available in three lengths and delivers industry leading light output with uniform color coverage even on close-up installations when using elliptical or elliptical wide optics designed specifically for true wall washing effects. The combination of RGBW LEDs offers unprecedented white light output quality, as well as a wide variety of intermediate color hues for a broad range of applications. Adjustable brackets allow the luminaire to be ground mounted, or installed in any position and orientation on building surfaces for maximum versatility. The lightweight unit features an integral power supply within its narrow profile, eliminating the need for additional electrical hardware. Programming options include stand-alone operation, master-satellite configurations, or operation with a remote DMX512 controller. All hardware is stainless steel.

PRODUCT SPECIFICATIONS

LUMEN OUTPUT	2475 lumens @ 39" x 27" RGBW Parade S 60 (see pg 3 for output values of all standard colors)
EFFICACY	33.4 (lm/W) RGBW
LUMEN MAINTENANCE	100,000 hours L70 @ 25°C*
COLOR	RGBW (6500K white) (see pg 4 for customization options)
OPTICS	39" x 27", 45", 55" x 15", 109" x 37", Wall Wash (Additional optics available upon request)
OPERATING TEMPERATURE	-40° to 122° F (-40° to 50° C)
HOUSING	Extruded aluminum body with powder coat
MOUNTING	Bracket mount with locking hinge (custom mounting available upon request)
WEIGHT	S 60: 13.2 lbs. (6 kg) / S 40: 9.9 lbs. (4.5 kg) / S 20: 5.9 lbs. (2.7 kg)
CERTIFICATION	
INGRESS PROTECTION	Wet location rated IP67
IMPACT RATING	IK09 Parade S 20 / IK08 Parade S 40/60
VIBRATION RATING	ANSI C136.31 rated version available
CONTROL	Auto Control, DMX 512 (RDM E1.20), Wireless and 0-10V interfaces available
ADDITIONAL FEATURES	Automatic overtemperature protection / IR Remote

* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment, Griven values are conservatively derived from those numbers.



ELECTRICAL SPECIFICATIONS

INPUT VOLTAGE	100-277 VAC @ 50-60Hz
POWER CONSUMPTION	74W 0.63A @ 115VAC, 0.29A @ 277VAC 49W 0.41A @ 115VAC, 0.2A @ 277VAC 28W 0.21A @ 115VAC, 0.11A @ 277VAC
POWER FACTOR	S 20/S 40: >.98 @ 115VAC, >.92 @ 277VAC S 60: >.9 @ 115VAC, >.9 @ 277VAC
PROTECTION	Self-resetting fuse

IP67 / IK08-IK09 /  / 




HOW TO ORDER

PART	COLOR	VOLTAGE	OPTIC	ORIENTATION*	FINISH	ACCESSORIES	OPTIONS
PDS60 Parade S 60	RGBW	UNV 100-277V	MB Medium 39° x 27°	H Horizontal	SG Silver Gray	BND Barndoor	SD Spreading Diffuser (consult factory)
PDS40 Parade S 40	CCM Custom Monochrome		WB Wide 45°	V Vertical	CC Custom Color	FGS Full Glare Shield	3G ANSI C136.31 Vibration Rating
PDS20 Parade S 20			ELLB* Elliptical 55° x 15°		SGM Silver Gray Marine Grade	AGS Angled Glare Shield	
			ELWB* Elliptical Wide 109° x 37°		CCMG Custom Color Marine Grade	LVR Louver	
			WW Wall Wash				

* Specify horizontal or vertical orientation


DIMENSIONAL DRAWINGS

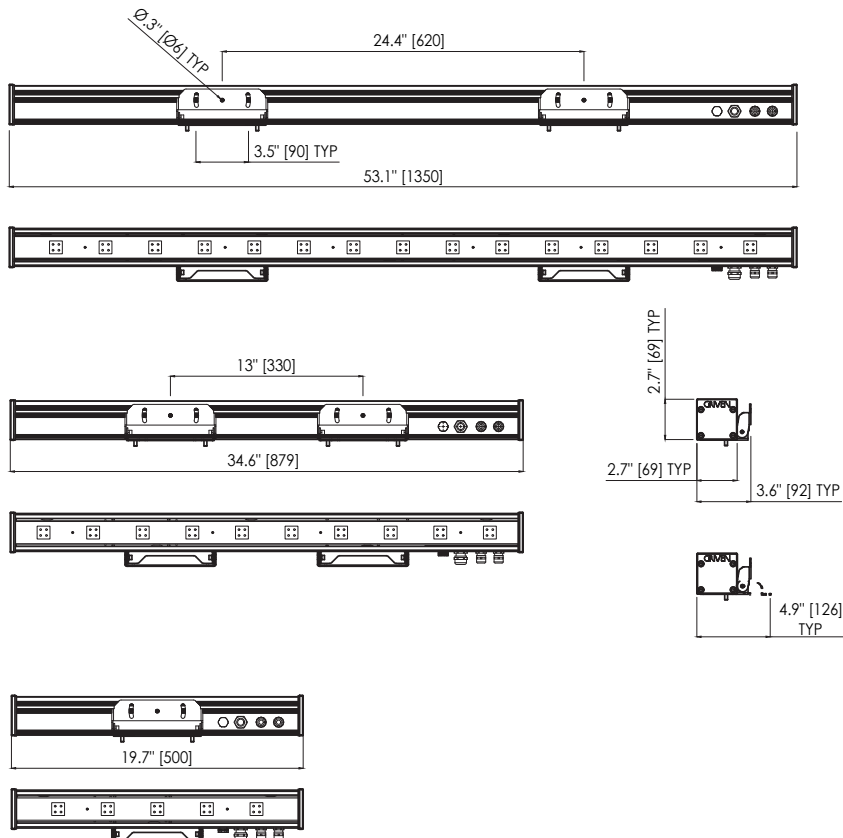

OPTIC ORIENTATION (For Elliptical Beams)



HORIZONTAL MODE (Standard)

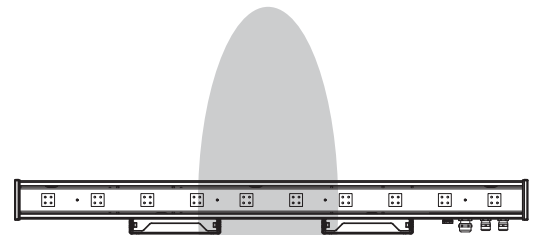


VERTICAL MODE (On Request)

PHOTOMETRICS


CANDELA DISTRIBUTION

MEDIUM (RGBW) 39° x 27°

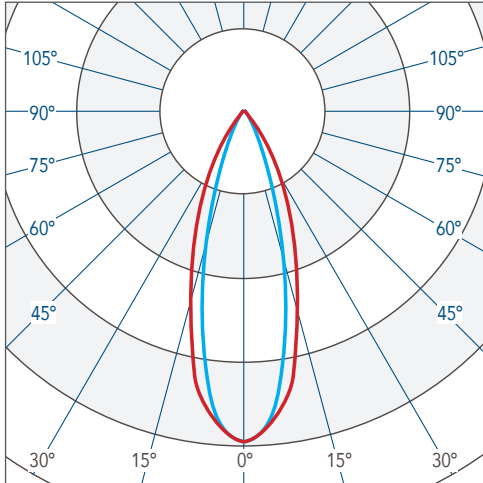


 Horizontal	S 60 CBCP 5942	2475 lm
 Vertical	S 40 CBCP 3960	1642 lm
	S 20 CBCP 1934	839 lm

WIDE (RGBW) 45°

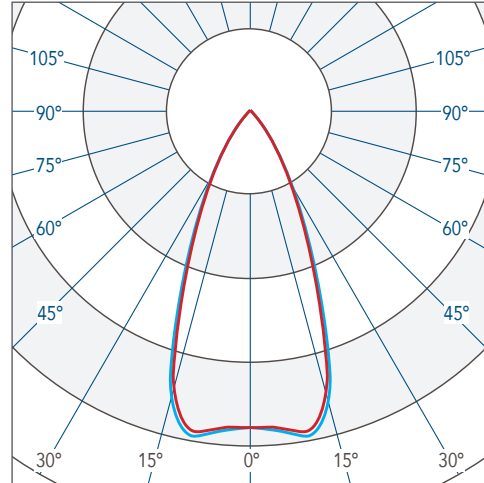


 Horizontal	S 60 CBCP 3777	2330 lm
 Vertical	S 40 CBCP 2542	1572 lm
	S 20 CBCP 1278	780 lm

ELLIPTICAL (RGBW) 55° x 14°

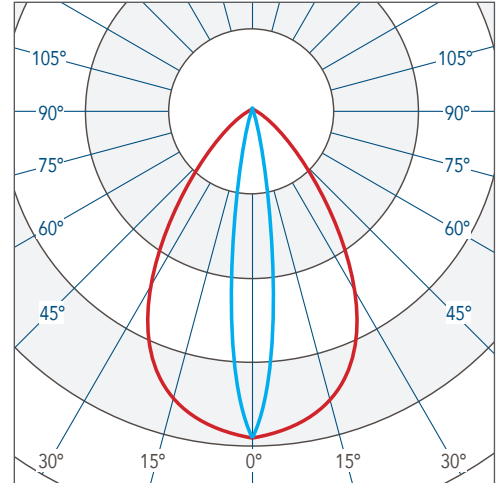


 Horizontal	S 60 CBCP 7370	2303 lm
 Vertical	S 40 CBCP 4636	1546 lm
	S 20 CBCP 2354	786 lm

ELLIPTICAL WIDE (RGBW) 109° x 37°

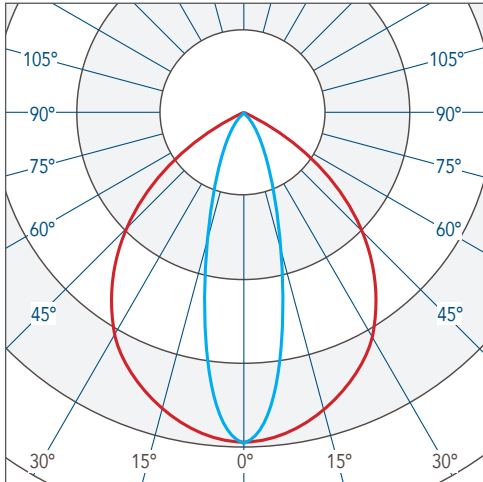

 Horizontal	S 60 CBCP 1913	2260 lm
 Vertical	S 40 CBCP 1532	1287 lm
	S 20 CBCP 633	776 lm

WALL WASH (RGBW)

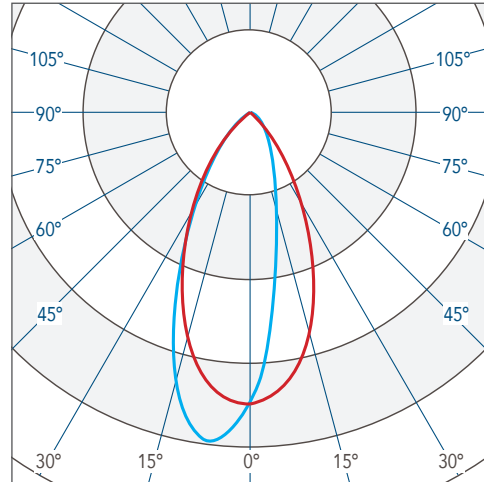


 Horizontal	S 60 CBCP 6053	2324 lm
 Vertical	S 40 CBCP 4093	1554 lm
	S 20 CBCP 2075	779 lm



CONTROL OPTIONS (DMX512, PRIMARY CONTROL PLATFORM)

Contact manufacturer for control system development.

Total run length limit for DMX is 984ft (300m) from controller to last fixture per run.

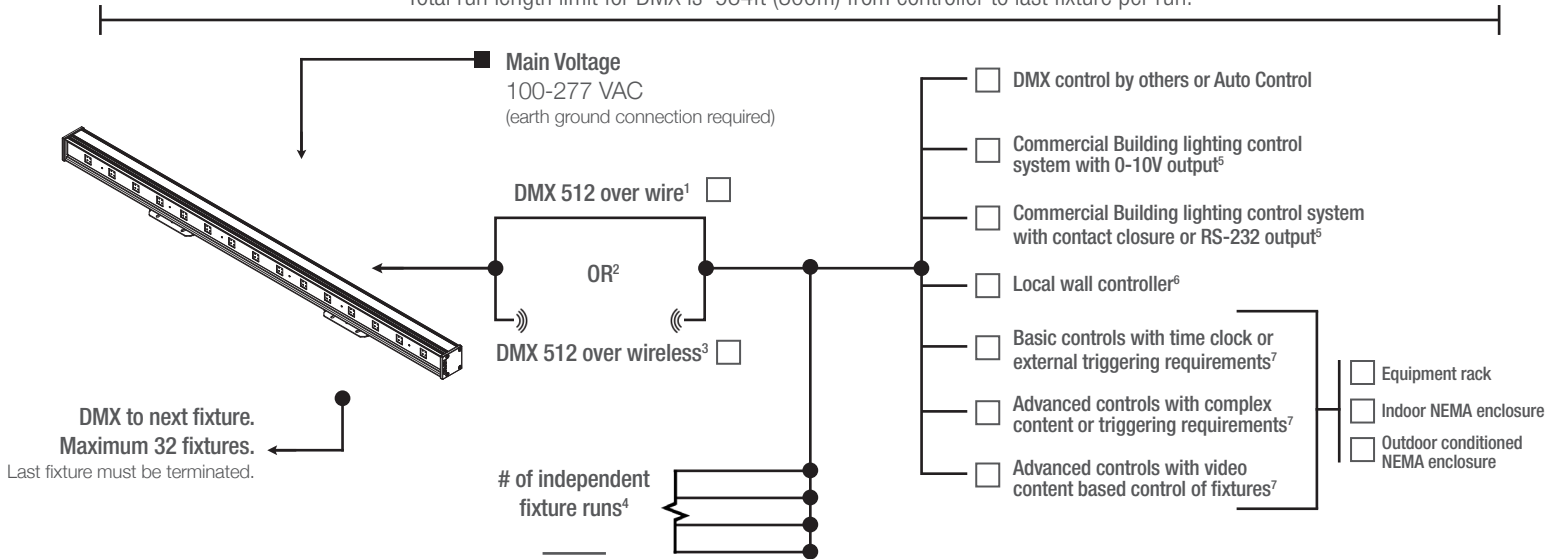

NOTES

1. Wire specifications are available from factory as well as approved wire for purchase.
2. Other control protocol solutions available. Contact factory for more information.
3. Wireless components are external to fixture. Distance limitations based on antennas chosen and site conditions. Contact factory for more information.
4. Based on maximum of 32 fixtures per run as well as any site constraints on conveyance of data.
5. For example: Lutron, Crestron, Encelium, Douglas, ETC by others. Griven control system will interface with building lighting control system.
6. Local wall controller for small applications. Wall controllers specified separately for larger systems.
7. Contact factory for assistance with specification. Onsite commissioning by Griven of control system is required.

PRODUCT OPTIONS



SPREADING DIFFUSER

Die cut spreading diffusers can be added to fixture. Factory sealed in fixture for highest performance and durability. Consult factory.



MARINE GRADE COATING


Maximum corrosion resistance for installations near salt or brackish water.




CUSTOM MONOCHROME

Fixtures with dedicated color LEDs available. Contact Griven USA to confirm availability of a custom color.


ACCESSORIES




Bardoor



Full Glare Shield



Angled Glare Shield



Louver

