


# MONO-CABLE (POWER & DMX)

## DESCRIPTION

The Griven Mono-Cable is designed for use with Griven luminaire systems using mono-cables (power and DMX wires jacketed as one cable) and Griven Mono-Cable Junctions Boxes (barrier for mixed voltages within the same box).

## FEATURES

- 16AWG-3, 22AWG-2, 10.4mm/0.408" OD, Shielded with drain, UL Type I-A-W, 105C, 600V, Black
- Power conductors: 16 AWG 26/30 Bare Annealed Copper (Black, White, Green)
- 120 Ohm data conductors: 22 AWG 7/30 Tinned Annealed Copper (Red, Black)
- Drain conductor: 22 AWG with aluminum/polyester tape shield (Bare)
- Cable Diameter: Ø10.4mm/[ Ø 0.408"] (Black)
- E125705 3C 16 AWG (1.31mm<sup>2</sup>), 2C 22 AWG (0.325mm<sup>2</sup>) 600V SHIELDED 105C DRY 75C WET -40C SUN-LIGHT RESISTANT, WATER RESISTANT VW-1 Griven USA

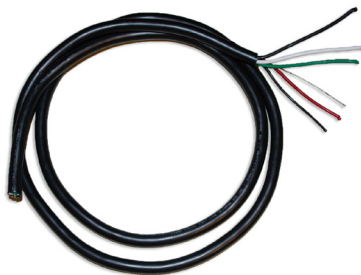

## MONO-CABLE (POWER & DMX)

GRV-MC-xx

Note: Specify (xx) as length in feet. Order quantity as number of cables.

Example: Order quantity (1) of **GRV-MC-25** for (1) piece of 25 foot cable.

**ORDERING INFORMATION: GRV-MC-xx (specify xx length in feet)**